


JCM 106 Bell Joint Leak Clamp

For quick repair or water tight joint assurance for rubber joint PVC pipe, solvent weld pipe or coupled pipe specify JCM 106 Bell Joint Leak Clamps. These clamps are engineered to provide a simple, dependable repair or assured joint. In addition, the JCM 106 eliminates possible notching of PVC pipe and offers maximum versatility and corrosion resistance.

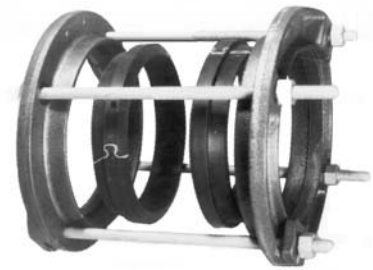

For Repair of:

PVC Rubber Joint Bells - Std. Steel Sizes (SDR 26, SDR 21)

PVC Solvent Weld Joints and Couplings

Std. Steel Threaded Couplings.

106 BELL JOINT LEAK CLAMP

| NOM. PIPE SIZE (IN.) | PIPE O.D. (IN.) | MAXIMUM BELL O.D. (IN.) | MAXIMUM LIP O.D. (IN.) | OVERALL LENGTH* | MAX. STD. CPLG. LENGTH | CATALOG NUMBER | APPR. WT. EACH (LBS.) |
|----------------------|-----------------|-------------------------|------------------------|-----------------|------------------------|----------------|-----------------------|
| 4 | 4.50 | 6.13 | 5.43 | 11-1/2 | 7 | 106-0450 | 12 |
| 6 | 6.63 | 8.25 | 7.56 | 11-1/2 | 7 | 106-0663 | 17 |
| 8 | 8.63 | 10.88 | 9.56 | 11-1/2 | 7 | 106-0863 | 21 |

*Dimension will change with use of studs.

JCM 142 Bell Joint Leak Clamps for PUSH-ON AND CAULK JOINT PIPE

The JCM 142 consists of two Spigot Rings. These spigot rings accommodate the boltless, stab-joint cast iron pipe has a long tapered bell which has no shoulder for anchoring a bell ring. The 142 repairs both push-on and caulk joint types of pipe. Special long stud bolts are supplied standard to provide adjustability.

142 BELL JOINT LEAK CLAMPS

| NOM. PIPE SIZE (IN.) | CATALOG NUMBER | APPR. WT. EACH (LBS.) |
|----------------------|----------------|-----------------------|
| 4 | 142-0480 | 18 |
| 6 | 142-0690 | 27 |
| 8 | 142-0905 | 33 |
| 10 | 142-1110 | 43 |
| 12 | 142-1320 | 48 |
| 14 | 142-1530 | 71 |
| 16 | 142-1740 | 74 |
| 18 | 142-1950 | 91 |
| 20 | 142-2160 | 100 |
| 24 | 142-2580 | 115 |
| 30 | 142-3200 | 171 |
| 36 | 142-3830 | 247 |



Larger sizes available upon request.