


JCM 162 Fabricated Lug All Stainless Steel Extended Range Clamps

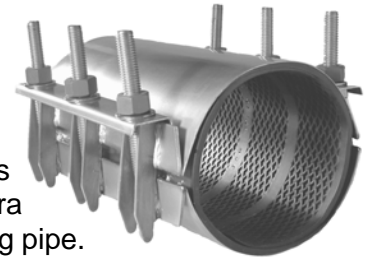

JCM 162 All Stainless Steel Extended Range Clamps - for piping systems that are exposed to hot soils or corrosive environments. Provides extra corrosion resistance of stainless steel to this means of repair and connecting pipe.

Image reflects 12" width

DOUBLE BAND CLAMPS

Nom. Pipe Size	Clamp O.D. Range	162 Stainless Steel Extended Range Clamp Number	Clamp Width - Approximate Weight					
			7"	12"	15"	18"	24"	30"
			Lbs.#	Lbs.#	Lbs.#	Lbs.#	Lbs.#	Lbs.#
4	4.44 - 5.24 4.74 - 5.57	0450 0480	\$286.80	301.10	342.20	497.50	599.00	671.50
			9#	13#	16#	25#	27#	34#
6	6.62 - 7.42 6.84 - 7.64	0663 0690	225.20	358.70	400.30	620.00	729.90	806.30
			11#	14#	19#	28#	30#	40#
8	8.62 - 9.42 8.99 - 9.79	0863 0905	260.70	415.20	487.00	697.30	826.70	985.70
			13#	19#	23#	36#	41#	45#
10	10.72 - 11.72 11.04 - 12.24	1075 1110	-	531.10	604.00	751.40	1,081.10	1,209.80
				28#	32#	43#	56#	64#
12	12.72 - 13.92 13.14 - 14.34 13.65 - 14.65	1275 1320 1365	-	628.50	762.10	1,002.50	1,113.20	1,522.40
				30#	40#	52#	60#	80#
14	15.20 - 16.20	1530	-	753.30	760.60	1,208.70	1,533.10	1,693.00
				34#	43#	55#	79#	86#
14 - 16	16.00 - 17.00 17.20 - 18.20	1600 1740	-	874.50	1,022.00	1,463.60	1,736.10	2,070.10
				36#	46#	59#	87#	92#
16 - 18	18.40 - 19.40	1846	-	946.30	1,091.10	1,589.00	1,852.10	2,154.70
				38#	49#	61#	90#	96#
18 - 20	19.40 - 20.40 20.40 - 21.40	1950 2050	-	1,065.20	1,211.00	1,754.10	2,163.80	2,480.30
				43#	52#	63#	94#	101#
20 - 22	21.40 - 22.40 22.50 - 23.60	2160 2260	-	1,319.60	1,600.10	2,018.00	2,279.40	3,055.90
				47#	59#	67#	99#	106#
Number of Bolts			4	6	8	8	12	16

HOW TO ORDER

1. Determine O.D. of pipe.
2. Select proper clamp O.D. range and band width.
3. Determine Model Number.
4. Specify clamp number.

Example: To fit Cast Iron pipe, 6.90 O.D. with 6" width, order: 162-0690-6

1. Clamp width should be equal to or greater than the pipe diameter for higher working pressures. Contact JCM Industries for recommendations.
2. Not recommended for use for joining plain end pressure pipe.
3. Other ranges and widths available upon request.
4. Clamps do not prevent lateral movement of pipe. Applications in which the pipe may move out of the clamp, proper anchorage of the pipe must be provided.

